

Programming OpenMP

Tasking Introduction

Christian Terboven



Tasking Motivation

Sudoku for Lazy Computer Scientists

- Lets solve Sudoku puzzles with brute multi-core force

	6						8	11			15	14			16
15	11				16	14				12			6		
13		9	12					3	16	14		15	11	10	
2		16		11		15	10	1							
	15	11	10			16	2	13	8	9	12				
12	13			4	1	5	6	2	3					11	10
5		6	1	12		9		15	11	10	7	16			3
	2				10		11	6		5			13		9
10	7	15	11	16				12	13						6
9						1			2		16	10			11
1		4	6	9	13			7		11		3	16		
16	14			7		10	15	4	6	1				13	8
11	10		15				16	9	12	13			1	5	4
		12		1	4	6		16				11	10		
		5		8	12	13		10			11	2			14
3	16			10			7			6				12	

- (1) Search an empty field
- (2) Try all numbers:
 - (2 a) Check Sudoku
 - If invalid: skip
 - If valid: Go to next field
- Wait for completion

Parallel Brute-force Sudoku

- This parallel algorithm finds all valid solutions

	6						8	11			15	14			16
15	11				16	14				12			6		
13		9	12					3	16	14		15	11	10	
2		16		11		15	10	1							
	15	11	10			16	2	13	8	9	12				
12	13			4	1	5	6	2	3					11	10
5		6	1	12		9		15	11	10	7	16			3
	2				10		11	6		5			13		9
10	7	15	11	16				12	13						6
9						1			2		16	10			11
1		4	6	9	13			7		11		3	16		
16	14			7		10	15	4	6	1				13	8
11	10		15				16	9	12	13			1	5	4
		12		1	4	6		16				11	10		
		5		8	12	13		10			11	2			14
3	16			10			7			6				12	

- (1) Search an empty field

first call contained in a
`#pragma omp parallel`
`#pragma omp single`
such that one task starts the
execution of the algorithm

- (2) Try all numbers:

- (2 a) Check Sudoku

- If invalid: skip


- If valid: Go to next number

`#pragma omp task`
needs to work on a new copy
of the Sudoku board

- Wait for completion

`#pragma omp taskwait`
wait for all child tasks

Performance Evaluation

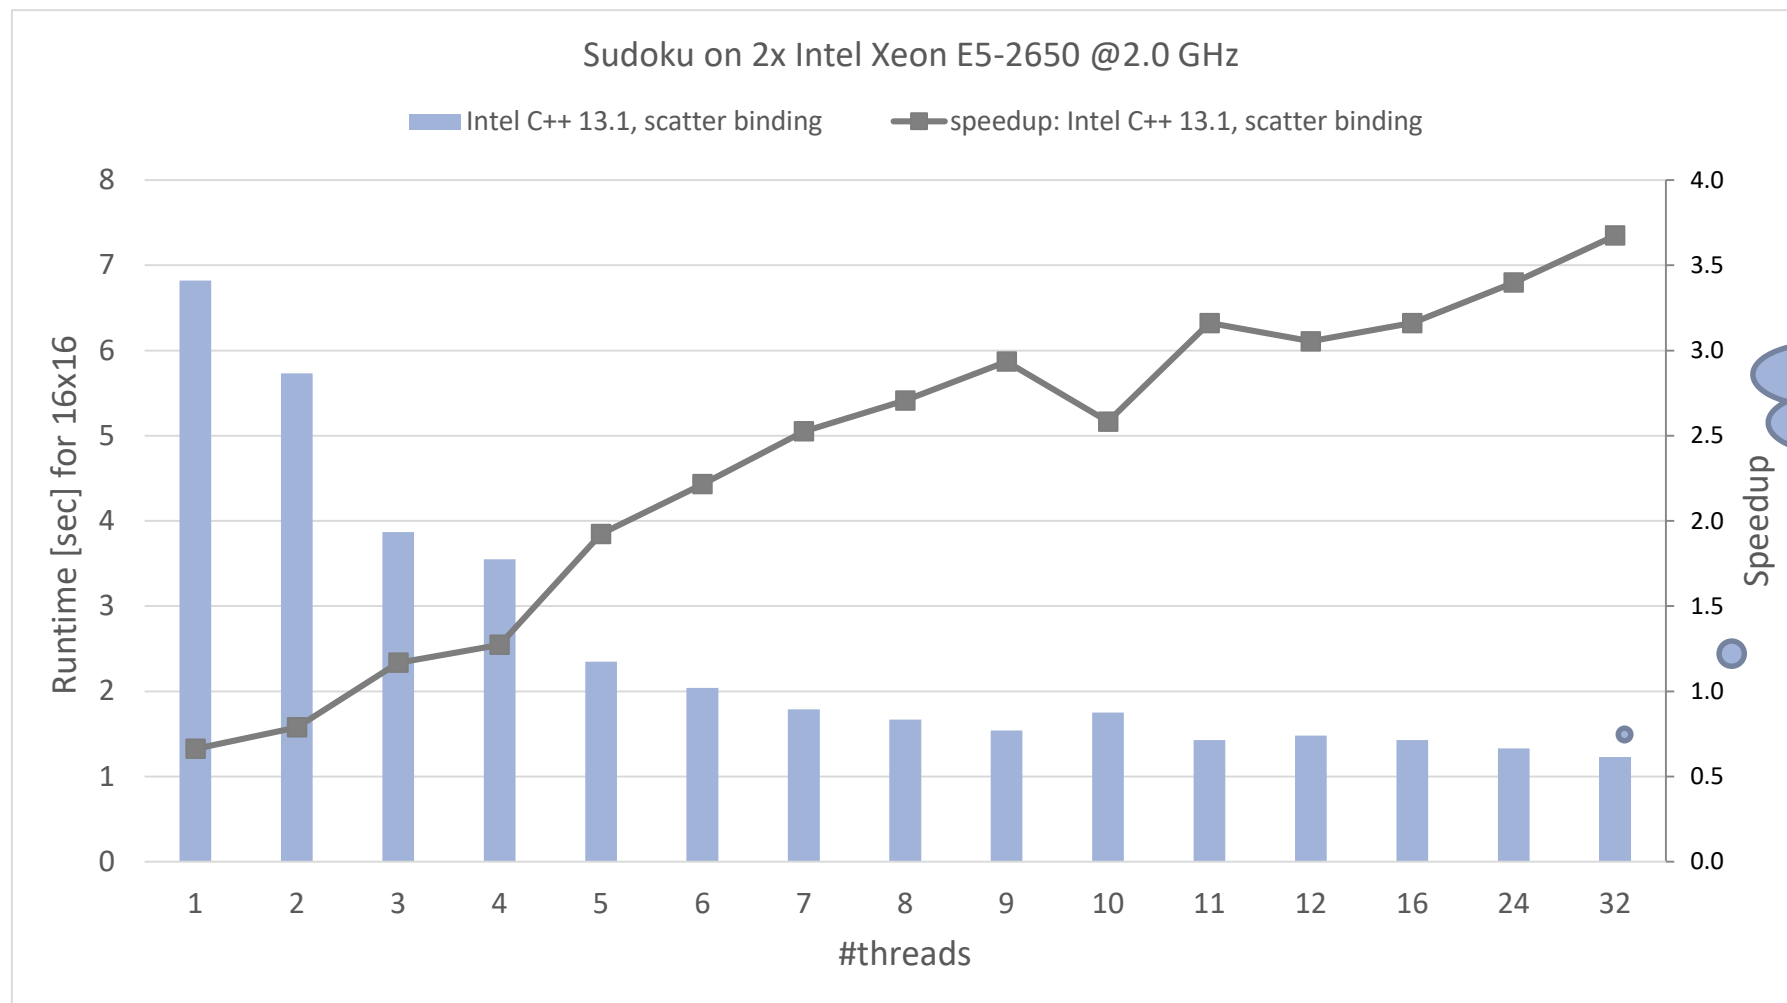

Is this the best
we can do?